



## JM SUPER DIRECT NOZZLE

**BRAND:** JM

- 1 1/2" male threaded (NPT) super direct nozzle

[Read More](#)

**Categories:** [JM](#), [SWIMMING POOL ACCESSORIES](#),  
[SWIMMING POOL PRODUCTS](#)

---

## JM SWIMMING POOL PUMP

**BRAND:** JM

**Download Files** [JM Pump Catalogue.pdf](#)

[Read More](#)

**Categories:** [JM](#), [SWIMMING POOL PRODUCTS](#),  
[SWIMMING POOL PUMP](#)





## JM TEXT KIT (1/2 OZ. OTOAHAND PHENOL)

**BRAND:** JM Test kit for chlorine and ph including easy to follow instruction (1/2oz. Otoahand and Phenol)

[Read More](#)

**Categories:** [JM](#), [SWIMMING POOL ACCESSORIES](#), [SWIMMING POOL PRODUCTS](#)



## JM TOP MOUNT SAND FILTER

**Specifications** • A unique and advanced design ensures fast draining and stabilizes water flow. • The 6-position multi-port valve with a user-friendly handle easily provides you a maximum flow at low pressure drop. • The sand filter is equipped with a precision pressure gauge • Efficient multi-lateral under drain assembly and self-cleaning laterals give totally balanced flow and back washing. • It is easy to install and to maintain. • The outlet turbidity is less than 2FTU.

[Read More](#)

**Categories:** [JM](#), [SWIMMING POOL FILTER](#), [SWIMMING POOL PRODUCTS](#)



## JM TOP MOUNT SAND FILTER (1.5")

**BRAND:** JM


**Specification** • Flange clamp design allows 360 degrees rotation for easy installation. • Top diffuser ensures even distribution of water over the top of the sand media bed. All internal piping is 1.6" (Diameter: 50mm) to give smooth, free-flowing performance.

[Read More](#)

**Categories:** [JM](#), [SWIMMING POOL FILTER](#)

---

## JM UNIVERSAL QUICKSNAP BUTTERFLY CLIPS

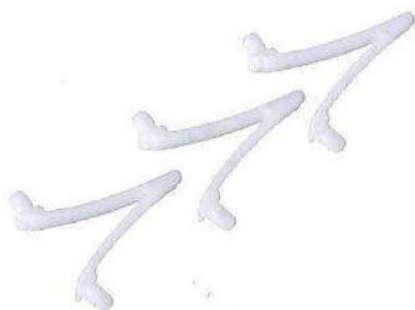

**BRAND:** JM Comes in a pack of 3 pcs.

[Read More](#)

**Categories:** [JM](#), [SWIMMING POOL ACCESSORIES](#),  
[SWIMMING POOL PRODUCTS](#)

---

## JM WARRIOR PUMP

**BRAND:** JM [Download Files](#)

[JM\\_Warrior\\_Pumps\\_2021.pdf](#)

**Jakmax Warrior Pump**

High Performance Pool Pump

**FEATURES:** • Installation - Inground pools, spas, fountains and water features • Large strainer basket with see-through lid cover • Self-Priming (3m) with high flow rate • 2 inch unions for easy installation • Quality construction, strong and durable • Thermal protection, class F and IP 55 • Maximum operating pressure : 50 PSI

[Read More](#)

**Categories:** [JM](#), [SWIMMING POOL PRODUCTS](#),  
[SWIMMING POOL PUMP](#)

---

## JM, 7 POSITION TOP VALVE

**BRAND:** JM

[Read More](#)

**Categories:** [JM](#), [SWIMMING POOL FILTER](#), [SWIMMING POOL PRODUCTS](#)

---





## JM, SAND FILTER SYSTEM (1.5")

**BRAND:** JM

**Specification** • Systems are designed for quick assembly and precise alignment components • Pumps and filters are performance-matched to provide maximum flow and energy efficiency • Filter base are molded of PP for long-lasting performance • 7-position valve provides maximum flow at low pressure drop

[Read More](#)

**Categories:** [JM](#), [SWIMMING POOL FILTER](#), [SWIMMING POOL PRODUCTS](#)



## KAWASAKI BRUSHCUTTER (BG-45KM)

**BRAND:** KAWASAKI

**SPECIFICATIONS** • Type : Forced air-cooled ,2-stroke, single cylinder • Displacement : 45.5cc / Max.output 1.9HP • Bore x stroke : 42.5x32mm • Engine speed : 7500 RPM • Starting/Ignition : Recoil starter / Ignition coil • Connect system : Auto centrifugal- Clutch • Fuel tank capacity : 0.9Litre • Engine : Kawasaki Tj045E • Shaft assy : Soft shaft 970mm/6.7 • Gear assy :  $\phi$ 26-7T • Size engine / shalf : 350x310x420mm 1335x100x90mm • Dry weight : 12kgs

[Read More](#)

**Categories:** [BRUSHCUTTER](#), [BRUSHCUTTERS](#), [OUTDOOR AND GARDEN EQUIPMENT](#)



## KAWASAKI BRUSHCUTTER (PP-45KT)

**BRAND:** KAWASAKI

**SPECIFICATIONS** • Type : Forced air-cooled ,2-stroke,single cylinder • Displacement : 45.5cc / Max.output 1.9HP • Bore x stroke : 42.5x32mm • Engine speed : 7500 RPM • Starting/Ignition : Recoil starter / Ignition coil • Connect system : Auto centrifugal- Clutch • Fuel tank capacity : 0.9Litre • Engine : Kawasaki Tj045E • Shaft assy : Soft shaft 970mm/6.7 • Gear assy :  $\phi$ 26-7T • Size engine / shalf : 350x310x420mm 1335x100x90mm • Dry weight : 11.8kgs

[Read More](#)

**Categories:** [BRUSHCUTTER](#), [BRUSHCUTTERS](#), [OUTDOOR AND GARDEN EQUIPMENT](#)



## KAWASAKI BRUSHCUTTER (SS-45K)

**BRAND:** KAWASAKI

**SPECIFICATIONS** • Type : Forced air-cooled ,2-stroke,single cylinder • Displacement : 45.5cc / Max.output 1.9HP • Bore x stroke : 42.5x32mm • Engine speed : 7500 RPM • Starting/Ignition : Recoil starter / Ignition coil • Connect system : Auto centrifugal- Clutch • Fuel tank capacity : 0.9Litre • Engine : Kawasaki Tj045E • Shaft assy : 1500mm • Gear assy :  $\phi$ 28-9T • Size engine / shalf : 280x275x210mm 1635x165x110mm • Dry weight : 10.1kgs

[Read More](#)

**Categories:** [BRUSHCUTTER](#), [BRUSHCUTTERS](#), [OUTDOOR AND GARDEN EQUIPMENT](#)

