

JM HYDRO-SPA PUMPS

SPA BATH/WHIRLPOOL PUMPS




Features

- Installation - Spas, bath tubs and whirlpools
- Compact design to fit small confines
- Dry run protection - Pump only run when there is water
- 1.5 inch unions for easy installation
- Quality construction, strong and durable
- Thermal protection, class F and IP 55
- Maximum operating pressure: 50 PSI
- Maximum temperature: 40 Deg C

S/N	Code	Power Nom	Voltage (50Hz)	Amps	Max Flow LPM	Max H m	Port (Slip)	Capacitor	Carton Wt.
1	JMP-SP20237	3/4 HP	220-240V	3.8 A	280 LPM	11 m	1.5" x 1.5"	10 uF / 450V	8.9 Kg
2	JMP-SP20238	1 HP	220-240V	5.8 A	380 LPM	14 m	1.5" x 1.5"	20 uF / 450V	10.4 Kg

Performances

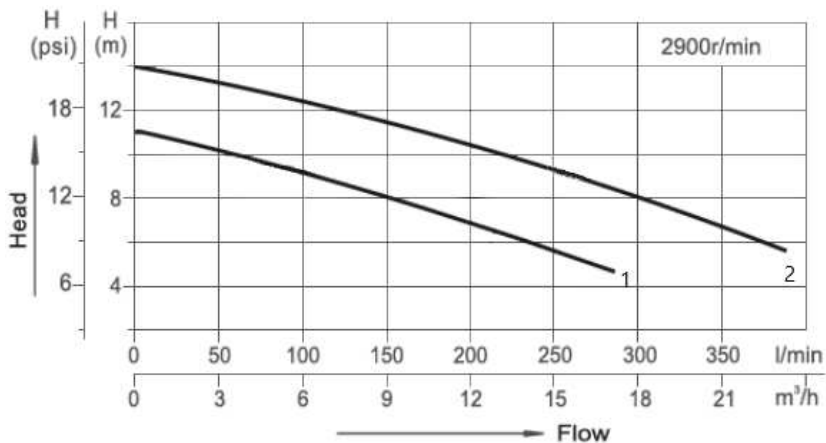

Dimensions

