

JM HYDRO-JET PUMPS

SPA BATH/WHIRLPOOL PUMPS


Features

- Installation - Spas, bath tubs and whirlpools
- Compact design to fit small confines
- Dry run protection - Pump only run when there is water
- 1.5 inch unions for easy installation
- Quality construction, strong and durable
- Thermal protection, class F and IP 55
- Maximum operating pressure: 50 PSI
- Maximum temperature: 40 Deg C



S/N	Code	Power Nom	Voltage (50Hz)	Amps	Max Flow LPM	Max H m	Port (Slip)	Capacitor	Carton Wt.
1	JMP-HJET050	1/3 HP	220-240V	2 A	180 LPM	10 m	1.5" x 1.5"	10 uF / 450V	6.6 Kg
2	JMP-HJET100	3/4 HP	220-240V	3.8 A	300 LPM	12 m	1.5" x 1.5"	15 uF / 450V	8.3 Kg
3	JMP-HJET150	1 HP	220-240V	5.8 A	380 LPM	16 m	1.5" x 1.5"	20 uF / 450V	11.4 Kg

Performances

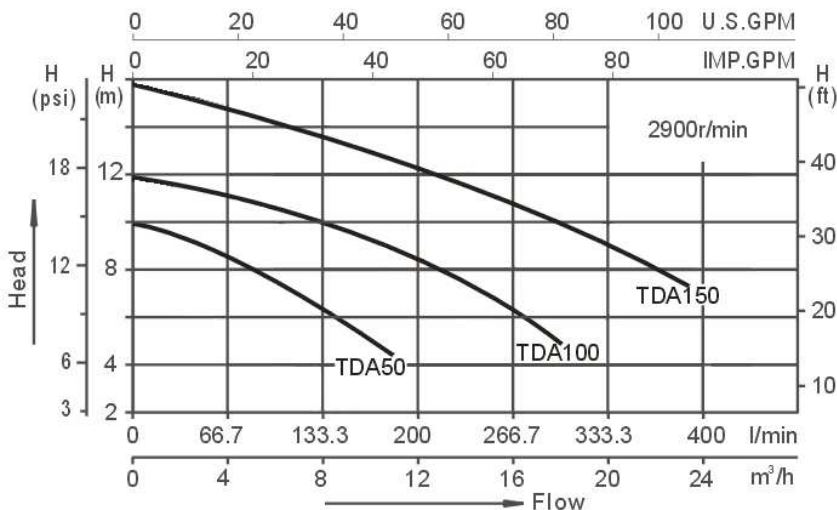

Model	Shape size (mm)									
	A	B	C	D	E	F	L	H	H1	H2
TDA50	100	153	88	100	53	89	317	195	188	83
TDA100	124	156	120	106	60	86	347	205	195	90
TDA150	124	186	120	127	54	120	402	218	217	96

Dimensions

