

Model

CHM4-ES

HORIZONTAL MULTISTAGE CENTRIFUGAL PUMP SERIES



APPLICATION FIELDS

- Air conditioning system
- Filling machinery
- Water supply and pressurization system
- Cooling system
- Industrial cleaning
- Aquaculture
- Water treatment application
- Supporting use of chiller
- Family water supply



APPLICATIONS LIMITS

- Thin, clean, non-combustible, and non explosive liquid containing no solid particle or fiber
- Applicable to deliver tap water, alkaline mineral water, softened water or mildly-corrosive medium
- The use of a large-power motor must be considered when the density or

viscosity of the medium delivered is higher than that of water

- Medium temperature: 0°C -70°C for normal temperature type: 0°C ~120°C for hot water type
- Ambient temperature: 0°C -+50°C

PERFORMANCE CURVES

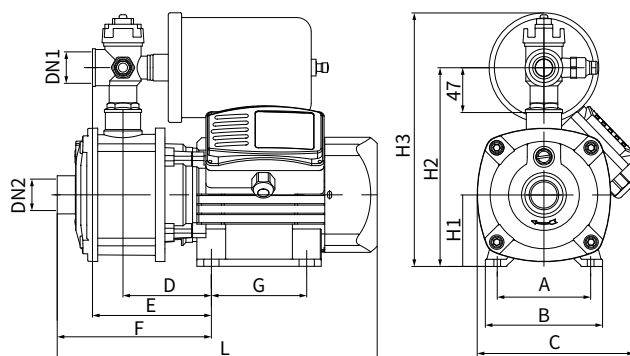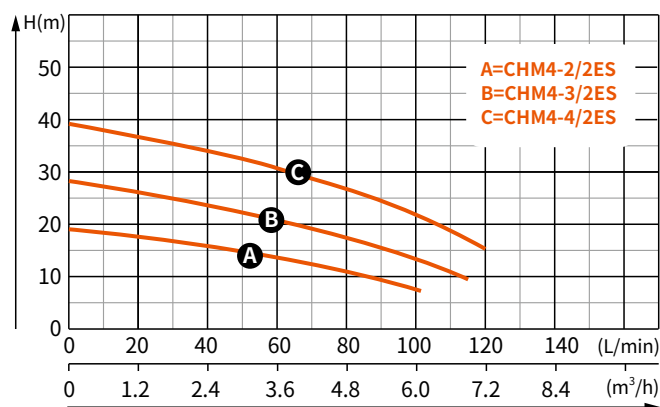

TECHNICAL DATA

Model	Power		Voltage	Discharge head in metres (For kPa*10)								PIPE
	HP	kW		5	10	15	20	25	30	35	40	
				H(m)								
CHM4-2/2ES	0.5	0.37	230	105	86	47						1.25"×1"
CHM4-3/2ES	0.75	0.55	230	115	113	91	64	28				1.25"×1"
CHM4-4/2ES	1	0.75	230	120	120	120	106	88	63	32		1.25"×1"

DIMENSION

Model	Dim(mm)											DN1 (Inch)	DN2 (Inch)
	A	B	C	D	E	F	G	L	H1	H2	H3		
CHM4-2/2ES	98	123	165	93	125	162	100	336	75	209	266	1.25	1
CHM4-3/2ES	112	140	180	93	125	162	104	336	75	209	266	1.25	1
CHM4-4/2ES	112	140	180	93	125	180	104	354	75	209	266	1.25	1